

MagnaFIX System


a magnetic fixing system

MagnaFIX is a popular and easy to use secondary double glazing system. It comprises two strips, one metal and the other magnetic. The metal strip is white faced and has self-adhesive tape on one side. This strip is placed on the window frame around the area to be glazed. The magnetic strip, which is also self-adhesive is placed around the edges of the plastic sheet.


MagnaFIX is available in a 30m dispensing pack or a convenient 5m pre-pack which we can supply in an outer of 3 packs. For a single 5m pre-pack or loose by the metre.

MagnaFIX is intended for internal use only and NOT recommended for use with glass. Always fit to the main frame and not to opening windows.

HELPFUL HINTS - For larger windows (1200mm x 1200mm or bigger) we strongly recommend placing a couple of screws under the glazing panel to support the sheet. This will remove the risk of the sheet from slipping down and becoming detached.

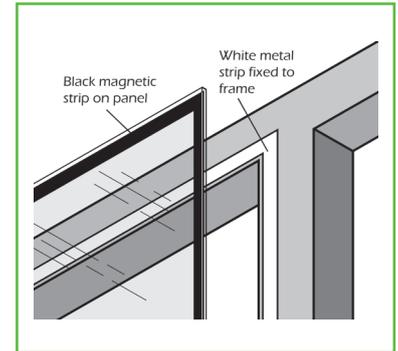

TOOLS REQUIRED - Tape measure, pencil and a strong pair of scissors.



Measuring up for your Plastic Sheeting

1. Measure the existing window pane, vertically (measurement A) and horizontally (measurement B). This is the visible glass only and does not include any frame.
2. Add 25mm to each measurement A & B. This will give you the size of the sheet required. Also ensure you have a minimum 19mm mounting surface on each side of your window.

Measuring up for your MagnaFIX

3. You will require 2 lengths at measurement A plus 25mm and 2 lengths at measurement B for your window (do not add 25mm to measurement B). Add these together to find out how much MagnaFIX you will need.

USING MAGNAFIX STEP BY STEP

4. Now clean and degrease the window surround using a suitable cleaner for best adhesion results.
5. Remove strips from packaging and begin by cutting and sticking the black magnetic strip to each edge of the plastic sheet.
6. Now hold the panel to the window frame so that it overlaps equally on each edge.
7. Draw a pencil line around the sheet on the frame
8. Cut and fit the white metal strip to the window frame, sticking it just inside the pencil marks.
9. Offer up the glazing panel to the window and click into place.

It is always best to remove double glazing in summer to allow ventilation.

PLEASE READ INSTRUCTIONS THOROUGHLY BEFORE CUTTING OR FITTING ANY SYSTEM

